


Cellyx™

Flat 25



Cellyx™ is our range of polyurethane acoustic foam. Acoustic foam is one of the most common used in acoustical treatment to reduce echoes and reverberations. The fire-rated foam density is engineered based on airflow resistive data. The flat shape provides basic sound absorption for low-high frequencies. Available in thickness of 25mm.

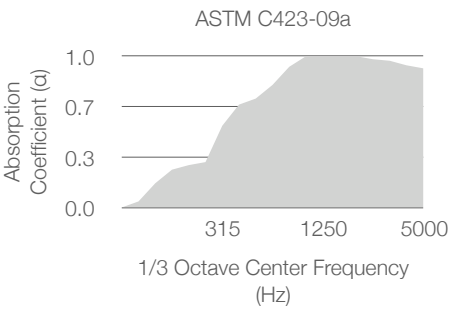

Technical Specifications

| | |
|--------------------|------------------------------|
| Profile | Flat |
| Material | Polyurethane Foam |
| Standard Dimension | 300mm x 300mm, 600mm x 600mm |
| Standard Thickness | 25mm |
| Flat Profile | 25mm Square Edge |
| Density | 25kg/m3 |
| Finishing | Flocked or Unflocked |
| Fire-Rated Test | ASTM E84-12a = Class A |
| Acoustics Test | ASTM C423-09a = NRC 0.76 |