


Light™ 10

Perforated Stretched Ceiling



Trademark and 2025 ©

Light™ stretched ceiling is a non-flammable polymer sheet secured by patent-pending tracks. The stretched membrane acts as a diffuser for LED lights installation, and can be made to achieve various designs such as 3D forms and organic non-planar surfaces. The microperforated membrane functions as an acoustic ceiling to absorb echoes.

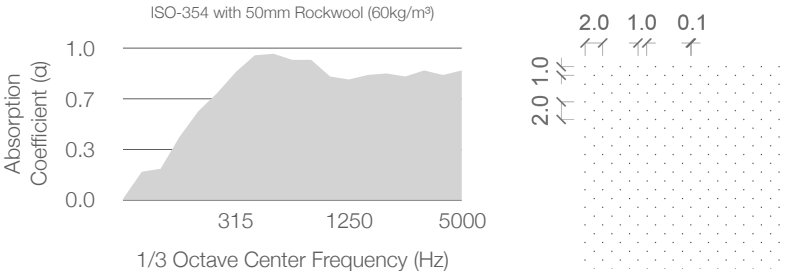

Technical Specifications

Structure	Stretched Ceiling Membrane
Material	Polymer and Aluminium
Standard Dimension	Maximum Width: 1.47m
Standard Thickness	0.18mm, 0.22mm, and 0.25mm
Finishing	Glossy, Matte, Satin
Transparency	Translucent, Transparent
Perforation Diameter	0.1mm
Perforation Pattern	2.0/1.0/0.1mm (V)
Density of Holes	500,000/m²
Perforation Percentage	1%
Fire-Rated Test	EN-13501-1 Class B, S1 d0
Acoustic Test	ASTM C423-01 = NRC 0.85 with 50mm Rockwool (60kg/m³)