



Timberix™ Dual Wave



Trademark and 2024 ©

The Timberix™ Dual Wave acoustic panel is a dual-sided mobile system that combines style and performance, featuring a curved diffuser on one side and a high-performance fabric absorber on the other.

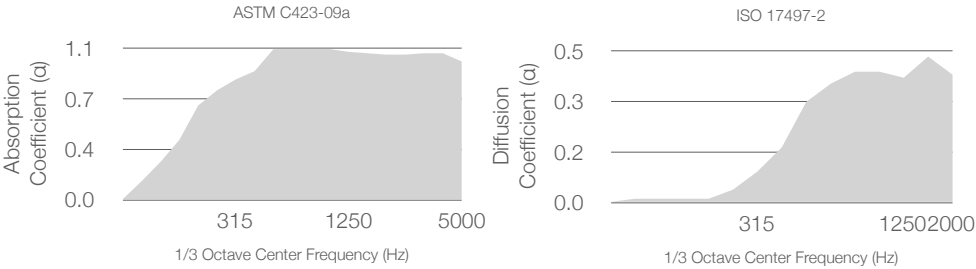

Technical Specifications

Structure	Curved Diffuser, Fabrix™ Absorber, Frame, Castor Wheels
Material	Laminate, Plywood, PVC Fabric System, Fiberglass Insulation, PU
Finishing	Laminate, Fabric
Diffuser and Absorber Width	640mm
Diffuser and Absorber Height	1740mm
Diffuser and Absorber Thickness	120mm
Options	Castor Wheels, Wall Mount
Toxicity Emission Test	BS 6853 Annex B = R < 1.0
Fire-Rated Test	EN 13501-1 = Class B s1, d0
Acoustics Test	ASTM C423-09a = NRC 1.00
Diffusion Coefficient	250Hz = 0.04, 500Hz = 0.33, 1000Hz = 0.43, 2000Hz = 0.42