




Aid™ Acoustics

Ceiling Tile 12

Trademark and 2026 ©

The Aid™ Acoustics Ceiling Tile 12, engineered for efficient integration with ceiling grid systems, delivers effective sound absorption in varied environments. Constructed from high-density fibreglass wool, it ensures a uniform appearance. Available in two sizes, 595mm x 595mm and 595mm x 1195mm, the tile accommodates different spatial needs. With three edge options—square, tegular, and insert—it provides installation flexibility. Ceiling Tile 12 is designed for both commercial and residential use, focusing on acoustical efficiency and architectural coherence.

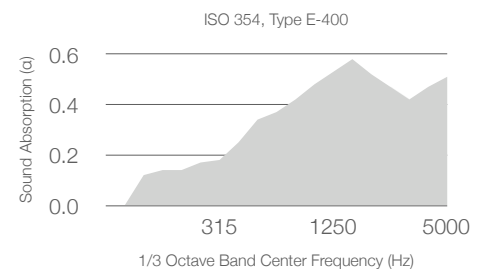

Technical Specifications

| | |
|-----------------------------------|---|
| Material | Fiberglass Wool, Fleece Surface |
| Standard Dimension | 595mm x 595mm, 595mm x 1195mm |
| Standard Thickness | 12mm |
| Density | 100 kg/m ³ |
| Edge Type | Square, Tegular, Insert |
| Dots Finishing | 600, 700, 800 Texture, White |
| Spray Finishing | White, Black, Grey, Pantone or RAL |
| Fire Classification | EN 13501-1 = Class A s1, d0 |
| Acoustic Test Configuration | Aid™ Acoustics Ceiling Tile 12 with Air Gap |
| Weighted Absorption (aw) | ISO 11654 = 0.52, Class D |
| Noise Reduction Coefficient (NRC) | ASTM C423 = 0.52 |