




Aid™ Acoustics Moss Wall 150

Trademark and 2026 ©

The Aid™ Acoustics Moss Wall 150, an ecologically conscious acoustic panel, combines sound absorption with environmental sustainability. Available in thicknesses from 50mm to 150mm, it's engineered for optimal acoustic performance. Its unique feature is sustainably sourced moss, offered in multiple colours, enhancing sound quality and adding natural aesthetics to architectural spaces. This low-maintenance moss doesn't need watering, soil, or sunlight, suitable for diverse environments. Ideal for spaces requiring acoustical solutions with low environmental impact.

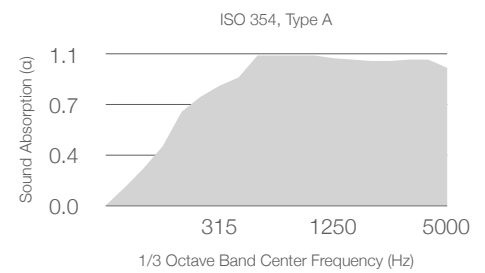

Technical Specifications

Material	Reindeer Moss, Substrate, Frame
Lichen Species	Cladonia Rangiferina
Standard Dimension	600mm x 600mm, 1200mm x 1200mm, Customised
Standard Thickness	50mm - 150mm
Density	40 kg/m ³
Frame	None, Timber, Aluminium
Finishing	Spray, Dots, Paint
Color	Shades of Green, Blue, Yellow, Red and White
Fire Classification	EN 13501-1 = Class B s1, d0
Care & Maintenance	No Watering or Light is Necessary
Acoustic Test Configuration	Aid™ Acoustics Moss Wall 150
Weighted Absorption (aw)	ISO 11654 = 1.00, Class A
Noise Reduction Coefficient (NRC)	ASTM C423 = 1.00