




Ljuds™ Diagonal 300



Trademark and 2026 ©

Ljuds™ Diagonal panels are characterised by finely grooved diagonal lines that run across the surface, creating a subtle yet dynamic sense of movement. When arranged strategically, these panels form a continuous pattern that enhance the geometric design and introduces a sophisticated texture to any space. The wood fibres are sound absorbent, and the cement matrix has high moisture diffusion and air permeability.

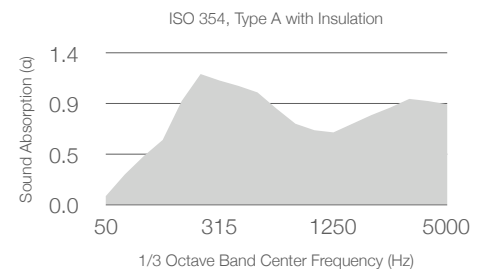

Technical Specifications

Material	Recyclable Wood Fibres in Cement Matrix
Standard Dimension	300mmW x 300mmH
Standard Thickness	15mm, 20mm, 25mm
Bevel Dimensions	20mmW x 10mmH
Bevel Angle	45 Degrees
Chamfered Edge	4 Sided
Eco-Friendly	EN 13986 = E1
Fire Classification	EN 13501-1 = Class B s1, d0
Acoustic Test Configuration	Ljuds™ 25 with Insulation
Weighted Absorption (α _w)	ISO 11654 = 0.80 (LH), Class B
Noise Reduction Coefficient (NRC)	ASTM C423 = 0.95