
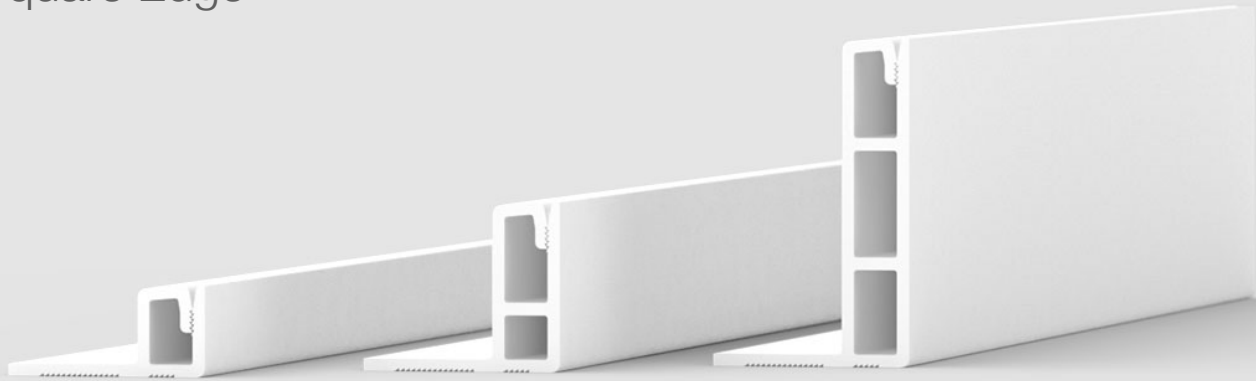



Fabrix™

Mid Load

Square Edge



Trademark and 2026 ©

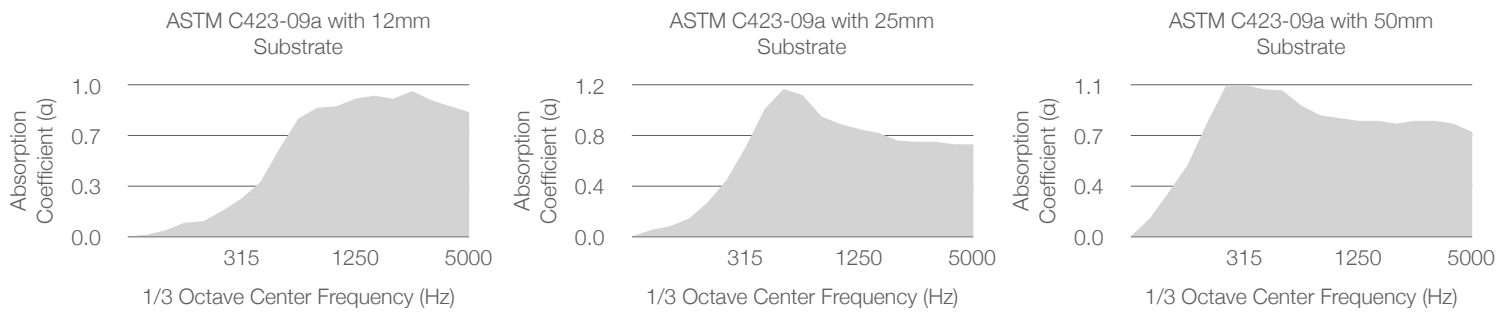

The Mid Load range joins the fabric to create a seam. The fabric sits tightly in between the teeth of the track. The teeth are serrated downwards to keep the fabric from slipping out. The track features an anti-warp feature to prevent an imprint on the fabric, and also an anti-slip feature to adhere better to surfaces.

Technical Specifications

| | |
|------------------------|--|
| Material | Polymer |
| Standard Dimension | 2000mmL |
| Standard Height | 15mm, 27mm, 53mm |
| Standard Thickness | 2mm |
| Toxicity Emission Test | BS 6853 Annex B = R < 1.0 |
| Fire Classification | EN 13501-1 = Class B s1, d0 |
| Sound Absorption | ASTM C423-09a 12mm Acoustic Foam = NRC 0.65 25mm Fibreglass Wool = NRC 0.80 50mm Fiberglass Wool = NRC 0.95 |