





# Aid™ Acoustics

## Round Perforation

E 25/25/12

Trademark and 2026 ©

The Aid™ Acoustics Round Perforation E25/25/12, designed for integration with ceiling grid systems, enhances sound absorption in spaces. Available in sizes of 595mm x 595mm, 600mm x 600mm, 1200mm x 2400mm or 1220mm x 2440mm, and is suitable for both commercial and residential applications.

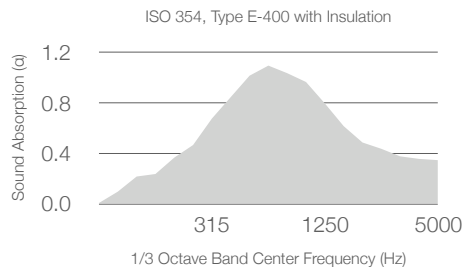

### Technical Specifications

Material	Gypsum
Standard Dimension	595mm x 595mm, 600mm x 600mm 1200mm x 2400mm, 1220mm x 2440mm
Standard Thickness	9.5mm, 12mm, 15mm
Distances Between Two Holes	25/25mm
Diameter Of Holes	12mm
Standard Pattern	E 25/25/12mm
Edge Type	Square, Tegular
Fire Classification	EN 13501-1 = Class A1
Acoustic Test Configuration	Round Perforation E 25/25/12 with Insulation & Air Gap
Weighted Absorption (α <sub>w</sub> )	ISO 11654 = 0.75, Class C
Noise Reduction Coefficient (NRC)	ASTM C423 = 0.75