





Aid™ Acoustics

Round Perforation E 8/8/3

Trademark and 2026 ©

The Aid™ Acoustics Round Perforation E8/8/3, designed for integration with ceiling grid systems, enhances sound absorption in spaces. Available in sizes of 595mm x 595mm, 600mm x 600mm, 1200mm x 2400mm or 1220mm x 2440mm, and is suitable for both commercial and residential applications.

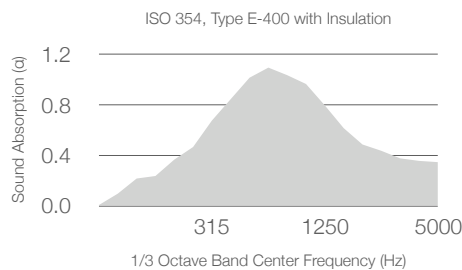

Technical Specifications

Material	Gypsum
Standard Dimension	595mm x 595mm, 600mm x 600mm 1200mm x 2400mm, 1220mm x 2440mm
Standard Thickness	9.5mm, 12mm, 15mm
Distances Between Two Holes	8/8mm
Diameter Of Holes	3mm
Standard Pattern	E 8/8/3mm
Edge Type	Square, Tegular
Fire Classification	EN 13501-1 = Class A1
Acoustic Test Configuration	Round Perforation E 8/8/3 with Insulation & Air Gap
Weighted Absorption (aw)	ISO 11654 = 0.75, Class C
Noise Reduction Coefficient (NRC)	ASTM C423 = 0.75