


Aid™ Acoustics

Mineral Tile 15



Trademark and 2026 ©

The Aid™ Acoustics Mineral Tile 15, engineered for efficient integration with ceiling grid systems, delivers effective sound absorption in varied environments. Constructed from high-density mineral wool, it ensures a uniform appearance. Available in two sizes, 595mm x 595mm and 595mm x 1195mm, the tile accommodates different spatial needs. With three edge options—square, tegular, and insert—it provides installation flexibility. Ceiling Tile 15 is designed for both commercial and residential use, focusing on acoustical efficiency and architectural coherence.

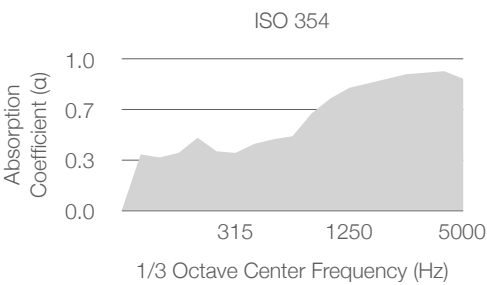

Technical Specifications

Material	Mineral Wool
Standard Dimension	595mm x 595mm, 595mm x 1195mm
Standard Thickness	15mm
Density	260 kg/m³
Edge Type	Square, Tegular, Insert
Finishing	Textured White
Moisture Resistance	Standard or Moisture Resistant
Fire-Rated Test	EN 13501-1 = Class A s1, d0
Acoustic Test	ISO 354 = NRC 0.60